


## 2 X 9W LED 600MM / 2 X 18W LED 1200MM NON EMERGENCY LED WIRE GUARD BATTEN - DIFFUSED BATTEN

### PRODUCT RANGE

CODE	DESCRIPTION
220SBWG	2 x 9W Non Emergency LED 600mm Wire Guard Batten
220SBDIFF	2 x 9W Non Emergency LED 600mm Diffused Batten
440SBWG	2 x 18W Non Emergency LED 1200mm Wire Guard Batten
440SBDIFF	2 x 18W Non Emergency LED 1200mm Diffused Batten



Wire Guard Batten

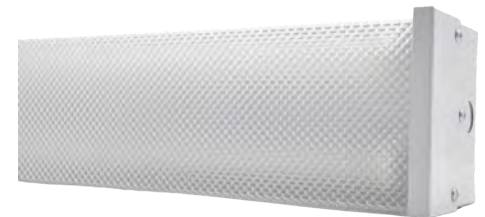

Diffused Batten

### ORDERING INFORMATION

Carton Qty	6 pieces
Weight	<b>SBWG:</b> 2.0kg (600mm) - 12.0kg (1200mm)
	<b>SBDIFF:</b> 1.8kg (600mm) - 10.8kg (1200mm)
Dimension (L x W x H)	<b>600mm:</b> 620mm x 125mm x 91mm
	<b>1200mm:</b> 1230mm x 125mm x 91mm

### OPERATIONAL INFORMATION

#### TECHNICAL SPECIFICATIONS

Voltage (V); Frequency (Hz)	220-260V; 50Hz
Operating Temperature	-25° - 45° C
IP Rating	IP20
Wiring	Large Terminal Block
Mounting Type	Surface Mounted
Construction	Powder Coated Metal Body
Standards	AS/NZS 60598.1
	EMC

#### BATTERY AND LEDS

Power Consumption	<b>600mm:</b> 20W on 240V;
	<b>1200mm:</b> 40W on 240V
Power Factor	>0.95
Lens	LED Lamp Rated 50,000 hours
Lumens Output	<b>600mm:</b> 2000lm;
	<b>1200mm:</b> 4000lm
Colour Temperature	5000k
Beam Angle	110 Degrees

#### REPLACEMENT PART

PART NUMBER	DESCRIPTION
WG2	Wire Guard to suit 600mm Batten
DIFF2	Prismatic Diffuser to suit 600mm Batten
WG4	Wire Guard to suit 1200mm Batten
DIFF4	Prismatic Diffuser to suit 1200mm Batten

