



# EXBOXWPB (R/L)

3w LED Wall Mount Weatherproof Freezer Exit

PRODUCT CODE: EXBOXWPB (R/L)



## FEATURES

- Remote box for freezer application
- Works in -30°C environment
- Weatherproof IP65 rating
- High temperature NiCad batteries
- Viewing distance 24M
- Suitable for wall mount



Easy to install  
with large  
terminal block




High powered  
long life LED



Fully compliant  
with AS/NZ 2293

## 3W LED WALL MOUNT WEATHERPROOF FREEZER EXIT CODE: EXBOXWPB (R/L)

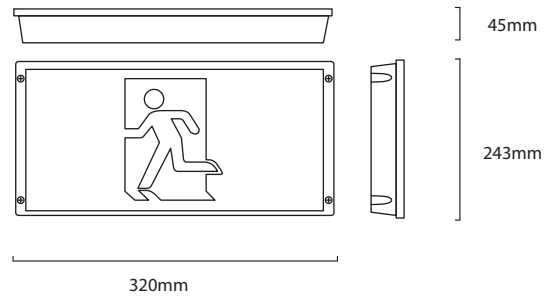

### TECHNICAL SPECIFICATIONS

|                                 |  |                         |                        |
|---------------------------------|--|-------------------------|------------------------|
| <b>Product Code</b>             | EXBOXWPB (No Arrow)                                    | EXBOXWPBR (Right Arrow) | EXBOXWPBL (Left Arrow) |
| <b>Description</b>              | 3W LED Wall Mount Weatherproof Maintained Freezer Exit |                         |                        |
| <b>Construction</b>             | ABS Body and Diffuser                                  |                         |                        |
| <b>Mounting</b>                 | Wall Mount   |                         |                        |
| <b>Dimension L x W x H</b>      | 320mm x 45mm x 243mm / Remote Box 320mm x 45mm x 243mm |                         |                        |
| <b>Operating Mode</b>           | Maintained   |                         |                        |
| <b>Testing System</b>           | Manual Test Switch                                     |                         |                        |
| <b>Charging Time</b>            | 16 Hours   |                         |                        |
| <b>Viewing Distance</b>         | 24 Metres  |                         |                        |
| <b>Lens</b>                     | LED Lamp Rated at 50,000 Hours                         |                         |                        |
| <b>Operating Voltage</b>        | 220-260Vac; 50Hz                                       |                         |                        |
| <b>Power Consumption</b>        | 3W   |                         |                        |
| <b>IP Rating</b>                | IP 65  |                         |                        |
| <b>Operating Temperature</b>    | -30° - 45° C   |                         |                        |
| <b>Weight</b>                   | Approximately 1.2Kg                                    |                         |                        |
| <b>Performance</b>              | AS/NZ 2293-2005  |                         |                        |
| <b>Emergency Classification</b> | EMBOXWPB (Emergency Option for Freezer) C0 E50 C90 E50 |                         |                        |

### REPLACEMENT PARTS

| PART NUMBER   | DESCRIPTION                  |
|---------------|------------------------------|
| <b>BBOXWP</b> | Battery, NiCd, 3.6 V 1600mAh |

### SPACING TABLE AND MOUNTING HEIGHT

| Classification | 2.1m | 2.4m | 2.7m | 3m   | 3.3m | 3.6m | 4m   | 5m   |
|----------------|------|------|------|------|------|------|------|------|
| <b>C0 E50</b>  | 9.8  | 11.0 | 12.0 | 12.8 | 13.8 | 14.6 | 15.6 | 16.8 |
| <b>C90 E50</b> | 9.8  | 11.0 | 12.0 | 12.8 | 13.8 | 14.6 | 15.6 | 16.8 |