


LED RECESSED BLADE EXIT
CODE: EXBLADE

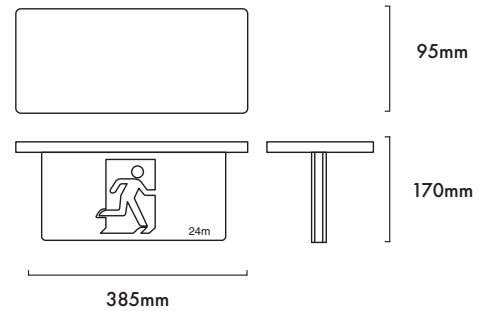

TECHNICAL SPECIFICATIONS

| | |
|------------------------------|---|
| Product Code | EXBLADE |
| Description | 3W LED Recessed Blade Exit |
| Construction | White Polycarbonate Body and Defuse, Acrylic Lens |
| Mounting | Recessed Mounted |
| Dimension L x W x H | 385mm x 95mm x 170mm |
| Operating Mode | Maintained |
| Testing System | Manual Test Switch |
| Charging Time | 16 Hours |
| Viewing Distance | 24 Metres |
| Lens | 18 LED Lamps + 2 LED Rated 50,000 Hours |
| Operating Voltage | 220-260Vac; 50Hz |
| Power Consumption | 3W |
| IP Rating | IP 20 |
| Operating Temperature | 1° - 45° C |
| Cut out | 310mm x 68mm |
| Wiring | Flex and Plug |
| Classification | C0=D10 C90=C12.5 |

REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION |
|---------------|----------------------------|
| BBLADE | Battery, NiMh 3.6V 2000mAh |

SPACING TABLE AND MOUNTING HEIGHT

| CLASSIFICATION | 2.1m | 2.4m | 2.7m | 3m | 3.3m | 3.6m | 4m | 5m |
|------------------|------|------|------|------|------|------|------|------|
| C0 D10 | 10.2 | 10.6 | 10.9 | 11.1 | 11.3 | 11.4 | 11.5 | 11.6 |
| C90 C12.5 | 7.8 | 8.2 | 8.6 | 8.9 | 9.2 | 9.5 | 9.8 | 10 |